

Ol' Lonely®



MAYTAG® COMMERCIAL SOFT-MOUNT, HIGH-SPEED EXTRACTORS

MFS100/125PF



BIG-LOAD PERFORMANCE, FLEXIBLE INSTALLATION

Maytag® soft-mount, high-speed extractors feature a suspension system that allows for wooden-floor installations.



MICROPROCESSOR CONTROLS

Maytag® microprocessor controls offer up to 20 programs with 99 steps per program to match the needs of your operation. Multilingual readouts make them easy for anyone to operate.

FOR YOUR OPERATION

- Soft-Mount Installation
- Inverter Drive Technology For Longer Life
- Up To 350 G's In Final Spin
- Easy-To-Operate Microprocessor Controls
- Adjustable Water Temperatures And Levels
- Manual Chemical Supply System
- Ability To Use Powdered Or Liquid Chemical Supply
- 8 Supply Signals
- Two Extra-Large Drain Valves For Faster Draining
- Extra-Large Door And Handle

BUILT-TO-LAST™ FEATURES

- Heavy-Duty Latch And Door Handle
- Durable Sealed Bearings
- Rugged Frame And Cabinet
- Easy-Access Design For Convenient Self-Service
- Build-To-Order — Minimum 8 Weeks Lead Time




**SPINS UP
TO 350 G's
TO EXTRACT MORE WATER**


Model MFS125PF shown.

LAUNDRY SOLUTIONS YOU CAN **DEPEND** ON.


CLP752



FRONT VIEW

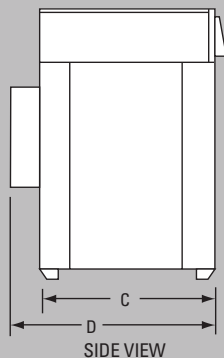

SIDE VIEW

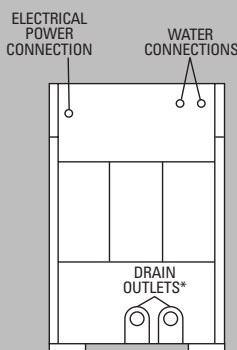

BACK VIEW

Maytag® Soft-Mount, High-Speed Extractors — MICROPROCESSOR CONTROL

	Soft-Mount, High-Speed Extractors	
WASHER SPECIFICATIONS		
MODEL	MFS100PF	MFS125PF
INVERTER DRIVE MOTOR — HP (kw)	10.25 (7.5)	10.25 (7.5)
VOLTAGE	208 – 240V Three-Phase	208 – 240V Three-Phase
BREAKER SIZE — amps	50	50
CAPACITY — lbs. (kg)	100 (45)	125 (57)
CYLINDER		
Volume — cu. ft. (liters)	14.2 (402)	18.3 (518)
Diameter — in. (cm)	35.98 (91.4)	35.98 (91.4)
Depth — in. (cm)	24.02 (61)	31.1 (79)
WASH SPEED — rpm	38	38
DISTRIBUTION SPEED — rpm	64	64
HIGH EXTRACT SPEED — rpm	790	790
HIGH G-FORCE	350	350
WATER INLET — in. (cm)	1 (2.5)	1 (2.5)
DRAIN OUTLETS	2	2
DRAIN HOSE — in. (cm)	3 (7.62)	3 (7.62)
CABINET		
Stainless Steel	•	•
DOOR HANDLE		
Stainless Steel	•	•
APPROXIMATE WEIGHT		
Crated — lbs. (kg)	3,740 (1,700)	3,894 (1,770)
Uncrated — lbs. (kg)	3,261 (1,479)	3,411 (1,547)
DIMENSIONS		
A) Height — in. (cm)	75 (190)	75 (190)
B) Width — in. (cm)	47 (119)	47 (119)
C) Depth — in. (cm)	52 (132)	59 (150)
D) Depth — in. (cm) — includes door handle and rear vent	56.3 (143)	63.4 (161)
Door Opening — in. (cm)	21.18 (53.8)	21.18 (53.8)

NEW YORK CITY
M.E.A.



MAYTAG® LIMITED WARRANTY

2 YEARS — ALL PARTS
**5 YEARS — SHELL,
WELDED FRAME ASSEMBLY,
BASKET, SHAFT ASSEMBLY,
BEARINGS AND SEALS**

For a period from the date of original purchase through the times listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

