



# MAYTAG® COMMERCIAL SUPER-CAPACITY DRYER

## MDE/MDG16PS



### QUICK, EFFICIENT, RELIABLE DRYING

Maytag® super-capacity dryers are the perfect match for our washers, delivering powerful 220 cfm diagonal airflow with a choice of fabric care cycles.

### MICROPROCESSOR CONTROLS

Maytag® Computer Trac® controls provide simple one-touch cycle selection. The panel displays operating instructions, prices, a cycle time countdown and more.



### FOR YOUR RESIDENTS:

- Display Shows Time Remaining In Cycle
- Convenient Top-Opening Door
- Extra-Large Door Opening

### FOR YOUR FACILITY:

- Reversible Door
- Large-Capacity Lint Filter
- Accepts A Variety Of Coin Slides
- Extra-Large Security Coin Vault
- Easy-To-Program Computer Trac® Controls
- Optional Audit System With Two-Way Data Communication
- Front Access For Faster Service


### BUILT-TO-LAST™ FEATURES:

- Premium Porcelain-Enamel Top
- Tri-Coat™ Cabinet Protection
- DuraCushion™ Dryer Drum
- Cushioned Drum Suspension
- Permanently Lubricated Bearings

**MICROPROCESSOR  
CONTROLS  
ARE EASY  
TO PROGRAM AND SIMPLE  
TO OPERATE.**

LAUNDRY SOLUTIONS YOU CAN *DEPEND* ON.

CLP715

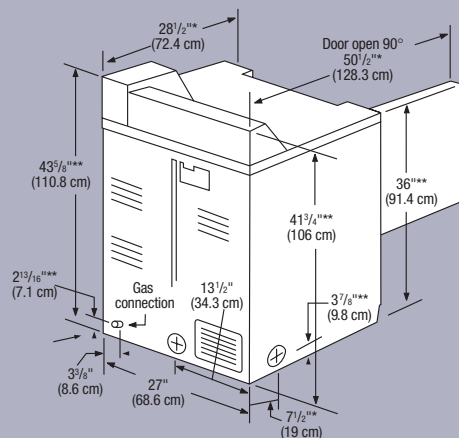


\* Includes 3/4" (1.9 cm) for hinge on back of dryer.


\*\* Dimensions will vary according to adjustment of leveling legs; add 1/2" (1.3 cm) minimum.

#### MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of  
90° Turns



4"  
(10.2 cm)



2 1/2"  
(6.4 cm)

#### 4"-diameter rigid metal duct

0	65 ft. (19.8 m)	59 ft. (18 m)
1	54 ft. (16.5 m)	48 ft. (14.6 m)
2	44 ft. (13.4 m)	38 ft. (11.6 m)
3	36 ft. (11 m)	30 ft. (9.1 m)
4	28 ft. (8.5 m)	22 ft. (6.7 m)

#### 4"-diameter flexible stiff-walled metal duct

0	36 ft. (11 m)	28 ft. (8.5 m)
1	32 ft. (9.8 m)	24 ft. (7.3 m)
2	28 ft. (8.5 m)	20 ft. (6.1 m)
3	25 ft. (7.6 m)	17 ft. (5.2 m)
4	23 ft. (7 m)	15 ft. (4.6 m)

## OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.



## Super-Capacity Dryer — MICROPROCESSOR COIN-SLIDE

	Super-Capacity Dryer
<b>DRYER SPECIFICATIONS</b>	
<b>MODEL</b>	MDE/MDG16PS
<b>MOTOR</b>	
Single-phase, thermoprotected against overload, auto-reset	•
HP (kw)	1/4 (.19)
<b>CAPACITY</b>	
Cu. ft. (cu. m)	6 (.17)
<b>AIRFLOW</b>	
Cfm (cmm)	220 (6.2)
<b>TUMBLE SPEED</b>	
Rpm	50 ± 1.5
<b>ELECTRICAL REQUIREMENTS</b>	
MDE model — 240V, 60 Hz	•
MDG model — 120V, 60 Hz	•
<b>BREAKER/FUSE REQUIREMENTS</b>	
MDE model — amps	30
MDG model — amps	15
<b>APPROXIMATE OVERALL DRAW</b>	
Watts	5,900
<b>EXHAUST DUCT DIAMETER</b>	
In. (cm)	4 (10.2)*
<b>NICHROME HELIX COIL HEATING ELEMENT</b>	
MDE models	•
<b>SINGLE-PORT BURNER</b>	
MDG models	•
<b>AUTOMATIC ELECTRIC BURNER IGNITION</b>	
MDG models	•
<b>GAS RATING</b>	
MDG models — BTU/hr. (kcal/hr.)	24,000 (6,048)
<b>GAS INLET</b>	
MDG models — in. (cm)	1/2 (1.3)
<b>AUTOMATIC PRESSURE REGULATOR</b>	
MDG models	•
<b>ADJUSTABLE LEVELING LEGS</b>	
	•
<b>COLOR</b>	
White	•
<b>APPROXIMATE WEIGHT</b>	
Crated — lbs. (kg)	163 (74)
Uncrated — lbs. (kg)	144 (65)

\*Use a minimum of 4" (10.2 cm) diameter rigid aluminum or rigid galvanized-steel duct. Never use plastic, non-metal or combustible duct.

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.



NEW YORK CITY  
M.E.A.

