



MAYTAG® COMMERCIAL SINGLE-LOAD STACK DRYER

LAUNDRY **SOLUTIONS**
YOU CAN **DEPEND** ON.

MAXIMIZE YOUR SPEED AND SPACE

When you want to free up floor space and help your laundry operation run more efficiently, choose the MLE/MLG23MNF. It offers two dryer pockets in the space of one single-load dryer. Laundry dries quickly and efficiently with less wrinkling, thanks to a choice of cycles and powerful 220-cfm diagonal airflow.



FOR YOUR OPERATION:

- Two Dryer Pockets In The Same Floor Space As One
- Faster Drying For Lower Energy Consumption
- Super Capacity Handles Big And Bulky Loads
- Extra-Large Doors And Drum Openings
- Manual Controls Are Simple To Operate
- Timer Counts Down Time Remaining In Cycle
- Front Access For Easy Do-It-Yourself Service
- Large-Capacity Lint Filter Inside The Door For Convenient Lint Removal

BUILT-TO-LAST™ FEATURES:

- Cushioned Drum Suspension With Permanently Lubricated Bearings
- Tri-Coat™ Cabinet Protection
- DuraCushion™ Drum Is Chip-And Scratch-Resistant
- The Best Warranty In The Business

MLE/MLG23MNF



**SIMPLE
CONTROLS**
ARE EASY TO OPERATE.

Maytag® Single-Load Stack Dryer

MECHANICAL CONTROL


Single-Load Stack Dryer/Dryer	
DRYER AND STACKED UNIT SPECIFICATIONS	
MODEL	MLE/MLG23MNF
MOTOR	
Single-phase, thermoprotected against overload, auto-reset	•
HP (kw)	1/4 (.19)
Tumble speed — rpm	50 ± 1.5
ELECTRICAL REQUIREMENTS	
Volts (Hz)	
Electric model	240 (60)
Gas model	120 (60)
Breaker/fuse requirements — amps	
Electric model (each drying chamber)	30
Gas model (each drying chamber)	15
Approximate overall wattage draw per drying chamber	5,900
CAPACITY — cu. ft. (cu. m)	6 (.17)
AIRFLOW	
Cfm (cmm) per pocket	220 (6.2)
EXHAUST DUCT DIAMETER — in. (cm)	2 outlets, 4 (10.2)*
NICHROME HELIX COIL HEATING ELEMENT (MLE model)	•
SINGLE-PORT BURNER WITH AUTOMATIC ELECTRIC IGNITION (MLG model)	•
GAS RATING (MLG model)	
BTU/hr. (kcal/hr.) per drying chamber	24,000 (6,048)
GAS INLET — in. (cm)	2 inlets, 1/2 (1.3)
ADJUSTABLE LEVELING LEGS	
•	
COLOR	
White	•
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	278 (125)
Uncrated — lbs. (kg)	254 (114)
DIMENSIONS	
Height — in. (cm)	71 1/2 (181.6) [†]
Width — in. (cm)	27 (69.1)
Depth — in. (cm)	27 1/2 (69.9) ^{††}

* Use a minimum of 4" (10.2 cm) -diameter rigid aluminum or galvanized steel duct. Never use plastic, nonmetal or combustible duct.

[†] Dimensions will vary according to adjustment of leveling legs; add 1/2" to 2" min.

^{††} Additional depth with venting will take from 1 1/4" to 7" (2.9 cm to 17.9 cm) of depth depending on the vent method used.

Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

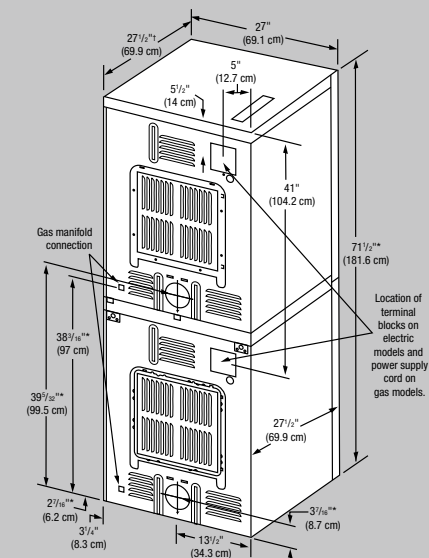

[†] Total depth of upper MN models (including timer knobs) is 29" (73.7 cm).

* Dimensions will vary according to adjustment of leveling legs; add 1/2" to 2" min.

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns	4" (10.2 cm)	2 1/2" (6.4 cm)
0	65 ft. (19.8 m)	59 ft. (18 m)
1	54 ft. (16.5 m)	48 ft. (14.6 m)
2	44 ft. (13.4 m)	38 ft. (11.6 m)
3	36 ft. (11 m)	30 ft. (9.1 m)
4	28 ft. (8.5 m)	22 ft. (6.7 m)

4"-diameter rigid metal duct

0	65 ft. (19.8 m)	59 ft. (18 m)
1	54 ft. (16.5 m)	48 ft. (14.6 m)
2	44 ft. (13.4 m)	38 ft. (11.6 m)
3	36 ft. (11 m)	30 ft. (9.1 m)
4	28 ft. (8.5 m)	22 ft. (6.7 m)

4"-diameter flexible stiff-walled metal duct

0	36 ft. (11 m)	28 ft. (8.5 m)
1	32 ft. (9.8 m)	24 ft. (7.3 m)
2	28 ft. (8.5 m)	20 ft. (6.1 m)
3	25 ft. (7.6 m)	17 ft. (5.2 m)
4	23 ft. (7 m)	15 ft. (4.6 m)



5 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



NEW YORK CITY
M.E.A.

